

SELF-CONTAINED EMERGENCY EXIT LIGHT



... is designed ruggedly to withstand to the exposure of the weather. A weatherproof version of the SAMCOM Model ELS 28. Compact and lightweight. Easy and fast installation with the thumb-press quick lock fastening system cuts down installation/maintenance time drastically.

Suitable for general outdoor and indoor application.



TECHNICAL CHARACTERISTICS

INPUT VOLTAGE	: 230Vac 50/60Hz ± 10% or 115Vac 50/60Hz ± 10% or others
BATTERY	: 2.4V 2.5AH/4.5AH High temp rated Nickel Cadmium cells or others
LAMP USED	: Fluorescent tube 1 x 8W daylight 30cm
RATED PERIOD	: > 1 hr, 2 hrs, 3 hrs or others
MODE	: Maintained
OPERATION TEMPERATURE	: ta 40 °C
POWER CONSUMPTION	: < 12VA
CHARGE MONITOR	: Super bright green LED 5mm Ø
RECHARGE PERIOD	: 16 ~ 24 hrs
EMERGENCY LUMINANCE	: > 8 cd/m ²
ELECTROMAGNETIC FIELD	: 11.8m gause@0.1m
CHARGER	: Hybrid controlled charger
PROTECTION	: Low volt cut-off to prevent battery over discharge Incoming AC fuse and Battery DC fuse Tropical climate protection coating on hybrid control circuit
CONSTRUCTION	: Moulded Fire Retardant ABS housing with 20mm Ø K/O hole and PC diffuser
DIMENSION	: 370mm(L) x 95mm(W) x 185mm(H)
WEIGHT	: 1.53kg (Net) / 1.63kg (Gross)
PACKING	: One unit per carton
CARTON / DIMENSION	: Double wall corrugated / 400mm(L) x 110mm(W) x 210mm(H)
COMPLIANCE	: CP 19: 2000, SS263 : Part 2, IEC 598-2-22
WARRANTY	: 1 Year

ELW 18




HYBRID IC CONTROLLED SELF-CONTAINED EMERGENCY LIGHTING FLUORESCENT LUMINAIRE

ORDERING INFORMATION

LEGEND	MODEL
EXIT	ELW 18-00
◀EXIT	ELW 18-01
EXIT▶	ELW 18-02
◀EXIT▶	ELW 18-03

DIMENSION (mm)

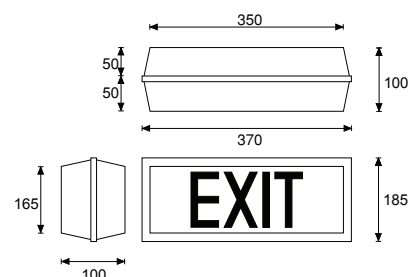

(1) Other signs are available upon request
(2) Colours are available upon request

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.



ISO9002-SAM-CAT-2014-009